


## Sintered Neodymium-Iron-Boron Magnets

These are also referred to as "Neo" or NdFeB magnets. They offer a combination of high magnetic output at moderate cost. Please contact Arnold for additional grade information and recommendations for protective coating. Assemblies using these magnets can also be provided.

Magnetic Properties	Characteristic	Units	min.	nominal	max.
	<b>Br</b> , Residual Induction		Gauss	14,400	14,600
		mT	1440	1460	1480
<b>H<sub>cB</sub></b> , Coercivity		Oersteds	13,600	13,850	14,100
		kA/m	1083	1102	1122
<b>H<sub>cJ</sub></b> , Intrinsic Coercivity		Oersteds	19,000		
		kA/m	1,512		
<b>BH<sub>max</sub></b> , Maximum Energy Product		MGOe	50	53	55
		kJ/m <sup>3</sup>	398	418	438

Thermal Properties	Characteristic	Units	C //	C ⊥
	Reversible Temperature Coefficients <sup>(1)</sup>	of Induction, α(Br)	%/°C	
of Coercivity, α(H <sub>cj</sub> )		%/°C		-0.55
Coefficient of Thermal Expansion <sup>(2)</sup>		ΔL/L per °Cx10 <sup>-6</sup>	7	-1
Other Properties	Thermal Conductivity	kcal/mhr°C	5.3	5.8
	Specific Heat <sup>(3)</sup>	cal/g°C		0.11
	Curie Temperature, T <sub>c</sub>	°C		310
	Flexural Strength		psi	
		MPa		285
Density	g/cm <sup>3</sup>			7.6
Hardness, Vickers	Hv			620
Electrical Resistivity, ρ	μΩ • cm			150 // 130 ⊥

Notes: (1) Coefficients measured between 20 and 150 °C  
 (2) Between 20 and 200 °C. Values are typical and can vary.  
 (3) Between 20 and 140 °C

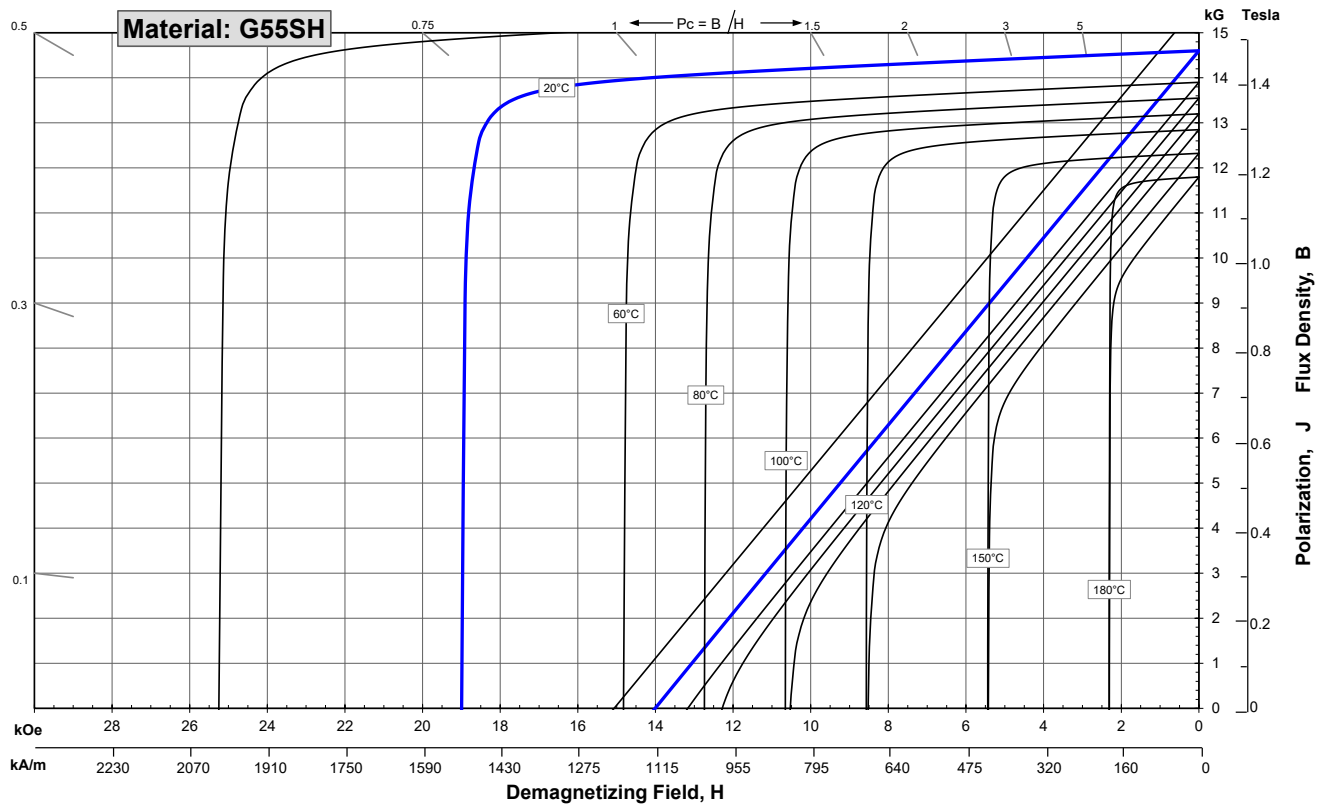

1 kA/m = 12.566 Oe 1 kOe = 79.577 kA/m

**Notes** The material data and demagnetization curves shown above represent typical properties that may vary due to product shape and size. **Demagnetization curves show nominal Br and minimum Hci.** Magnets can be supplied thermally stabilized or magnetically calibrated to customer specifications. Additional grades are available. Please contact the factory for information.