


## Sintered Neodymium-Iron-Boron Magnets

These are also referred to as "Neo" or NdFeB magnets. They offer a combination of high magnetic output at moderate cost. Please contact Arnold for additional grade information and recommendations for protective coating. Assemblies using these magnets can also be provided.

Characteristic	Units	Magnetic Properties		
		min.	nominal	max.
<b>Br</b> , Residual Induction	Gauss	14,200	14,400	14,600
	mT	1420	1440	1460
<b>H<sub>cB</sub></b> , Coercivity	Oersteds	13,400	13,700	14,000
	kA/m	1067	1090	1114
<b>H<sub>cJ</sub></b> , Intrinsic Coercivity	Oersteds	22,000		
	kA/m	1,751		
<b>BH<sub>max</sub></b> , Maximum Energy Product	MGOe	48	51	53
	kJ/m <sup>3</sup>	382	402	422

Characteristic	Units	Thermal Properties		
		C //	C ⊥	
Reversible Temperature Coefficients <sup>(1)</sup>				
	of Induction, α(Br)	%/°C	-0.12	
	of Coercivity, α(H <sub>cj</sub> )	%/°C	-0.55	
Coefficient of Thermal Expansion <sup>(2)</sup>	ΔL/L per °Cx10 <sup>-6</sup>	7	-1	
Thermal Conductivity	kcal/mhr°C	5.3	5.8	
Specific Heat <sup>(3)</sup>	cal/g°C	0.11		
Curie Temperature, T <sub>c</sub>	°C	310		
Other Properties	Flexural Strength	psi	41,300	
		MPa	285	
	Density	g/cm <sup>3</sup>	7.6	
	Hardness, Vickers	Hv	620	
	Electrical Resistivity, ρ	μΩ • cm	150 // 130 ⊥	

Notes: (1) Coefficients measured between 20 and 150 °C  
(2) Between 20 and 200 °C. Values are typical and can vary.  
(3) Between 20 and 140 °C

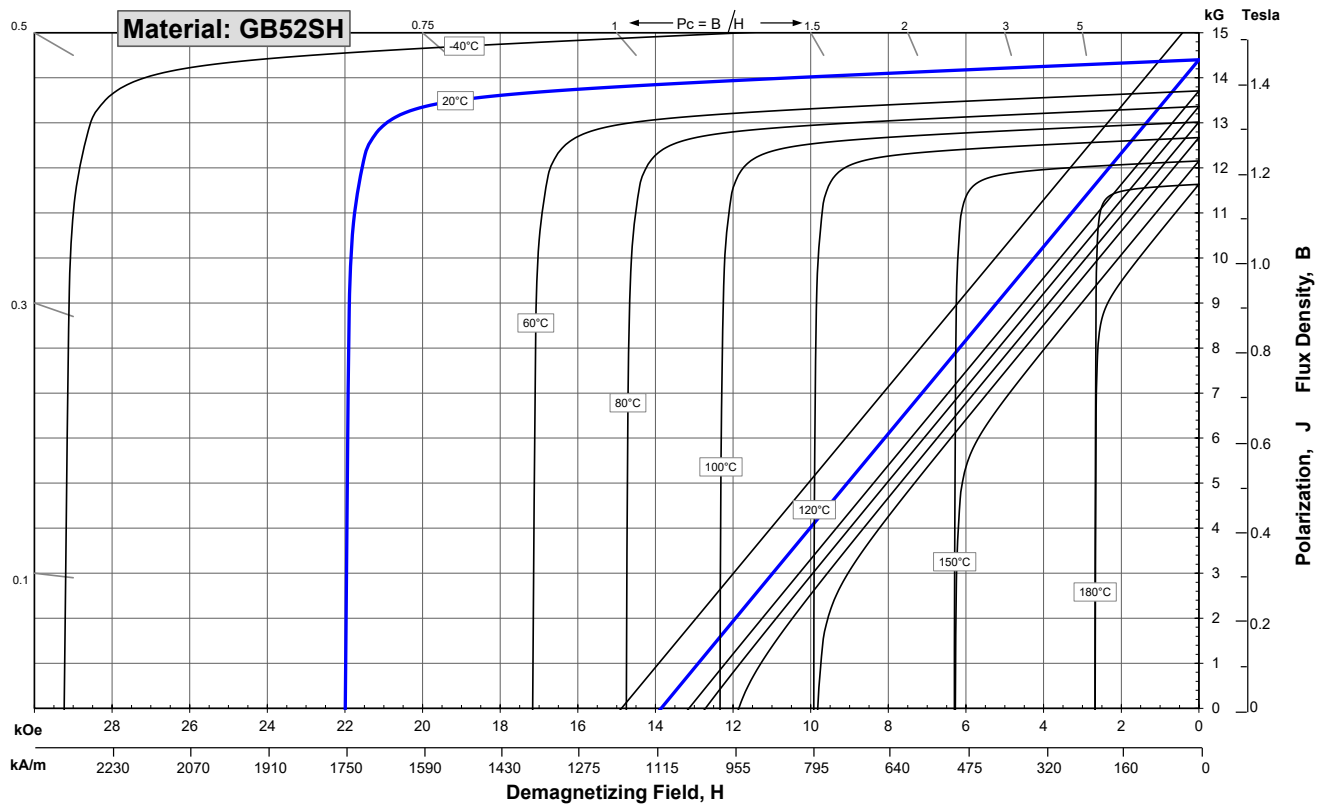

1 kA/m = 12.566 Oe    1 kOe = 79.577 kA/m

**Notes** The material data and demagnetization curves shown above represent typical properties that may vary due to product shape and size. **Demagnetization curves show nominal Br and minimum H<sub>cj</sub>.** Magnets can be supplied thermally stabilized or magnetically calibrated to customer specifications. Additional grades are available. Please contact the factory for information.